



TOLERANCES (inch)		
DIAMETER	D ₁	D ₂
1/2 - 3/4	-0.00040/-0.00200	h6

CORNER RADIUS TOLERANCES (inch)		
R = +/- 0.0018		

TOLERANCES (mm)		
DIAMETER	D ₁	D ₂
6 - 25	-0,010/-0,050	h6

CORNER RADIUS TOLERANCES (mm)		
R = +/- 0,03		

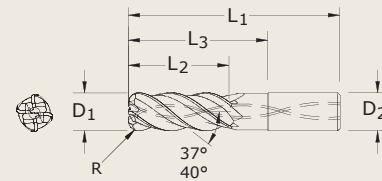

**43APF
(FRACTIONAL)**

Cutting Diameter D ₁	Length of Cut L ₂	Overall Length L ₁	Shank Diameter D ₂	Reach L ₃	Corner Radius R	Ti-NAMITE-B (TiB ₂) EDP No.
1/2	1-1/4	3-1/4	1/2	1-5/8	.030	34016
1/2	1-1/4	3-1/4	1/2	1-5/8	.060	34017
1/2	1-1/4	3-1/4	1/2	1-5/8	.090	34018
1/2	1-1/4	3-1/4	1/2	1-5/8	.120	34019
1/2	2	4	1/2	2-3/8	.030	34020
1/2	2	4	1/2	2-3/8	.060	34021
1/2	2	4	1/2	2-3/8	.090	34022
1/2	2	4	1/2	2-3/8	.120	34023
3/4	1-7/8	4-1/4	3/4	2-3/8	.030	34024
3/4	1-7/8	4-1/4	3/4	2-3/8	.060	34025
3/4	1-7/8	4-1/4	3/4	2-3/8	.090	34026
3/4	1-7/8	4-1/4	3/4	2-3/8	.120	34027
3/4	3	5-3/8	3/4	3-1/2	.030	34028
3/4	3	5-3/8	3/4	3-1/2	.060	34029
3/4	3	5-3/8	3/4	3-1/2	.090	34030
3/4	3	5-3/8	3/4	3-1/2	.120	34031

**43MAPF
(METRIC)**

Cutting Diameter D ₁	Length of Cut L ₂	Overall Length L ₁	Shank Diameter D ₂	Reach L ₃	Corner Radius R	Ti-NAMITE-B (TiB ₂) EDP No.
6,0	24,0	58,0	6,0	30,0	-	44627
8,0	32,0	64,0	8,0	40,0	-	44628
10,0	40,0	80,0	10,0	50,0	-	44629
12,0	30,0	83,0	12,0	40,0	-	44630
12,0	30,0	83,0	12,0	40,0	2,0	44745
12,0	30,0	83,0	12,0	40,0	3,0	44746
12,0	30,0	83,0	12,0	40,0	4,0	44747
12,0	30,0	83,0	12,0	50,0	0,5	44641
12,0	30,0	83,0	12,0	50,0	5,0	44642
12,0	48,0	100,0	12,0	62,0	-	44631
12,0	48,0	100,0	12,0	62,0	2,0	44748
12,0	48,0	100,0	12,0	62,0	3,0	44749
12,0	48,0	100,0	12,0	62,0	4,0	44750
16,0	42,0	93,0	16,0	51,0	5,0	44643
16,0	40,0	92,0	16,0	51,0	-	44634
16,0	40,0	92,0	16,0	51,0	2,0	44751
16,0	40,0	92,0	16,0	51,0	3,0	44752
16,0	40,0	92,0	16,0	51,0	4,0	44753
16,0	64,0	125,0	16,0	82,0	-	44635
16,0	64,0	125,0	16,0	82,0	2,0	44754
16,0	64,0	125,0	16,0	82,0	3,0	44755
16,0	64,0	125,0	16,0	82,0	4,0	44756
20,0	50,0	108,0	20,0	63,0	-	44636
20,0	50,0	108,0	20,0	63,0	3,0	44757
20,0	50,0	108,0	20,0	63,0	4,0	44758
20,0	50,0	108,0	20,0	63,0	5,0	44759
20,0	80,0	150,0	20,0	102,0	-	44637
20,0	80,0	150,0	20,0	102,0	3,0	44760
20,0	80,0	150,0	20,0	102,0	4,0	44761
20,0	80,0	150,0	20,0	102,0	5,0	44762
25,0	63,0	130,0	25,0	79,0	-	44638
25,0	63,0	130,0	25,0	79,0	3,0	44763
25,0	63,0	130,0	25,0	79,0	4,0	44764
25,0	63,0	130,0	25,0	79,0	5,0	44765
25,0	100,0	175,0	25,0	120,0	-	44639
25,0	100,0	175,0	25,0	120,0	3,0	44766
25,0	100,0	175,0	25,0	120,0	4,0	44767
25,0	100,0	175,0	25,0	120,0	5,0	44768

Available on request: • JetStream Technology