




Z-Carb-AP Variable Rake End Mills

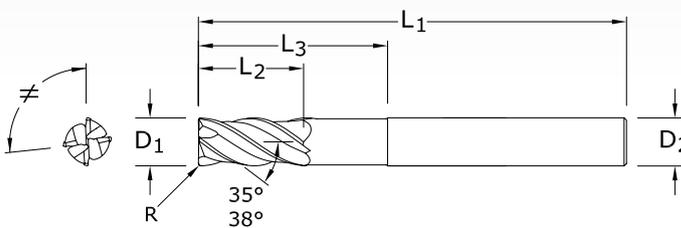

Z1MPIC
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

$D_1 = +0,000/-0,030$

$D_2 = h_6$

$R = +0,000/-0,050$

>6-10 DIAMETER

$D_1 = +0,000/-0,040$

$D_2 = h_6$

$R = +0,000/-0,050$

>10-25 DIAMETER

$D_1 = +0,000/-0,050$

$D_2 = h_6$

$R = +0,000/-0,050$

mm						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	TI-NAMITE-X W/FLAT
12,0	26,0	83,0	12,0	36,0	2,5	42731
12,0	26,0	83,0	12,0	36,0	3,0	42732
12,0	26,0	83,0	12,0	36,0	4,0	42733
16,0	32,0	92,0	16,0	42,0	2,5	42734
16,0	32,0	92,0	16,0	42,0	4,0	42735
16,0	32,0	92,0	16,0	42,0	6,0	42736
20,0	38,0	104,0	20,0	52,0	2,5	42737
20,0	38,0	104,0	20,0	52,0	4,0	42738
20,0	38,0	104,0	20,0	52,0	6,0	42739

TECH INFO 22

Any radii available – 7-10 day delivery

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM