



S-Carb Roughing End Mills



43MCB METRIC SERIES

TECH INFO 56

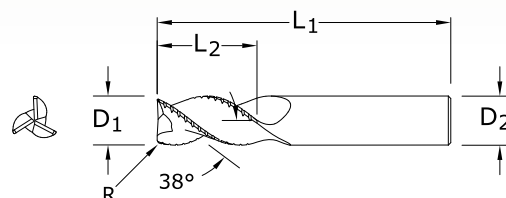

TOLERANCES (mm)

8-10 DIAMETER

$D_1 = +0,000/-0,009$

$D_2 = h_6$

$R = +0,000/-0,050$

>10-18 DIAMETER

$D_1 = +0,000/-0,011$

$D_2 = h_6$

$R = +0,000/-0,050$

>18-20 DIAMETER

$D_1 = +0,000/-0,013$

$D_2 = h_6$

$R = +0,000/-0,050$

NON-FERROUS
PLASTICS/COMPOSITES

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	mm			EDP NO.	
		OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	UNCOATED	TI-NAMITE-B (TiB ₂)
6,0	19,0	63,0	6,0	0,3	44298	44299
8,0	19,0	63,0	8,0	0,3	44300	44305
10,0	22,0	72,0	10,0	0,3	44301	44306
12,0	26,0	83,0	12,0	1,0	44302	44307
16,0	32,0	92,0	16,0	1,0	44303	44308
20,0	38,0	104,0	20,0	1,0	44304	44309

Any radii available – 7-10 day delivery