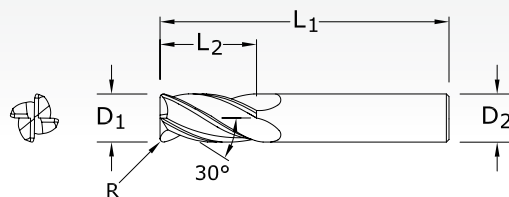


**TOLERANCES (mm)** $D_1 = +0,000/-0,050$ $D_2 = h_6$ $R = +0,000/-0,050$ **1MCR**
METRIC SERIES

TECH INFO 141

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	mm OVERALL LENGTH L_1	CORNER RADIUS R	SHANK DIAMETER D_2	EDP NO. Ti-NAMITE-A (AITIN)
4,0	14,0	50,0	0,25	4,0	40000
4,0	14,0	50,0	0,50	4,0	40001
4,0	14,0	50,0	1,00	4,0	40003
5,0	16,0	50,0	0,25	6,0	40004
5,0	16,0	50,0	0,50	6,0	40005
5,0	16,0	50,0	1,00	6,0	40007
6,0	19,0	50,0	0,25	6,0	40009
6,0	19,0	50,0	0,50	6,0	40010
6,0	19,0	50,0	0,75	6,0	40011
6,0	19,0	50,0	1,00	6,0	40012
8,0	20,0	63,0	0,50	8,0	40015
8,0	20,0	63,0	0,75	8,0	40016
8,0	20,0	63,0	1,00	8,0	40017
8,0	20,0	63,0	1,50	8,0	40019
8,0	20,0	63,0	2,00	8,0	40020
10,0	22,0	75,0	0,50	10,0	40021
10,0	22,0	75,0	1,00	10,0	40023
10,0	22,0	75,0	1,50	10,0	40024
10,0	22,0	75,0	2,00	10,0	40025
12,0	25,0	75,0	0,50	12,0	40028
12,0	25,0	75,0	1,00	12,0	40030
12,0	25,0	75,0	1,50	12,0	40031
12,0	25,0	75,0	2,00	12,0	40032
16,0	32,0	89,0	0,50	16,0	40035
16,0	32,0	89,0	1,00	16,0	40037
16,0	32,0	89,0	1,50	16,0	40038
16,0	32,0	89,0	2,00	16,0	40039

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES