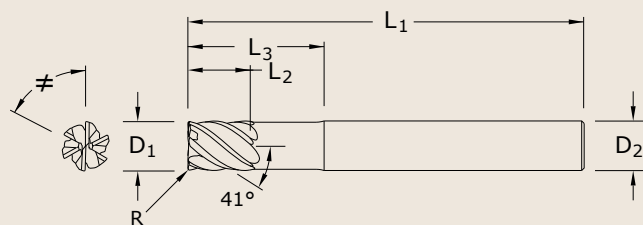


TOLERANCES (inch)			
DIAMETER	D ₁	D ₂	R
1/4 - 1	+0.000 / -0.002	h6	+0.000 / -0.002

TOLERANCES (mm)			
DIAMETER	D ₁	D ₂	R
6 - 20	+0,000 / -0,050	h6	+0,000 / -0,050


**SERIES 51LC
(FRACTIONAL)**

Cutting Diameter D ₁	Length of Cut L ₂	Overall Length L ₁	Shank Diameter D ₂	Reach L ₃	Corner Radius R	Ti-NAMITE-X EDP No.
1/4	3/8	4	1/4	1-1/8	0.015	35127
3/8	1/2	4	3/8	2-1/8	0.015	35128
3/8	1/2	4	3/8	2-1/8	0.03	35129
1/2	5/8	4	1/2	2-1/4	0.03	35130
1/2	5/8	4	1/2	2-1/4	0.09	35131
1/2	5/8	4	1/2	2-1/4	0.12	35132
5/8	3/4	5	5/8	2-1/2	0.03	35133
5/8	3/4	5	5/8	2-1/2	0.09	35134
5/8	3/4	5	5/8	2-1/2	0.12	35135
3/4	1	6	3/4	3-3/8	0.03	35136
3/4	1	6	3/4	3-3/8	0.09	35137
3/4	1	6	3/4	3-3/8	0.12	35138
1	1-1/4	6	1	3-3/8	0.03	35139
1	1-1/4	6	1	3-3/8	0.09	35140
1	1-1/4	6	1	3-3/8	0.12	35141

**SERIES 51MLC
(METRIC)**

Cutting Diameter D ₁	Length of Cut L ₂	Overall Length L ₁	Shank Diameter D ₂	Reach L ₃	Corner Radius R	Ti-NAMITE-X EDP No.
6	8	75	6	32	0,5	45127
8	10	75	8	32	0,5	45128
8	10	75	8	32	1,0	45129
10	12	100	10	40	1,0	45130
10	12	100	10	40	1,5	45131
10	12	100	10	40	2,0	45132
12	15	100	12	48	1,0	45133
12	15	100	12	48	1,5	45134
12	15	100	12	48	2,0	45135
16	20	115	16	65	1,0	45136
16	20	115	16	65	1,5	45137
16	20	115	16	65	2,0	45138
20	24	150	20	80	1,0	45139
20	24	150	20	80	1,5	45140
20	24	150	20	80	2,0	45141