


Series Z5MCR | Z-Carb HPR Corner Radius – Five Flute

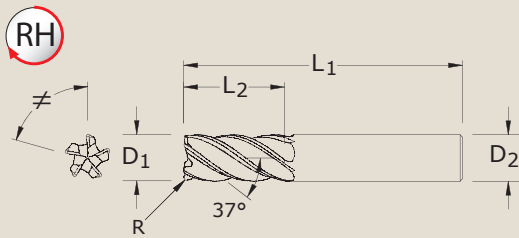

TOLERANCES (mm)

DIAMETER	D ₁	D ₂
6	+0,000 / -0,030	h6
> 6 - 10	+0,000 / -0,040	h6
> 10 - 25	+0,000 / -0,050	h6

CORNER RADIUS TOLERANCES (mm)

R = +0,000 / -0,050

SERIES Z5MCR
(METRIC)

Cutting Diameter D ₁	Length of Cut L ₂	Overall Length L ₁	Shank Diameter D ₂	Corner Radius R	Ti-Namite-M (TM) EDP No. w/o Flat	Ti-Namite-M (TM) EDP No. w/ Flat	Ti-Namite-M (TM) EDP No. w/Internal Coolant
6,0	9,0	54,0	6,0	0,5	47000	-	-
6,0	13,0	57,0	6,0	0,3	47001	-	-
6,0	13,0	57,0	6,0	0,5	47002	-	-
6,0	13,0	57,0	6,0	1,0	47003	-	-
6,0	13,0	57,0	6,0	1,5	47004	-	-
8,0	11,0	58,0	8,0	0,5	47005	-	-
8,0	18,0	63,0	8,0	0,5	47006	-	-
8,0	18,0	63,0	8,0	1,0	47007	-	-
8,0	18,0	63,0	8,0	1,5	47008	-	-
8,0	18,0	63,0	8,0	2,0	47009	-	-
10,0	13,0	66,0	10,0	1,0	47010	-	-
10,0	22,0	72,0	10,0	0,5	47011	-	-
10,0	22,0	72,0	10,0	1,0	47012	-	-
10,0	22,0	72,0	10,0	1,5	47013	-	-
10,0	22,0	72,0	10,0	2,0	47014	-	-
10,0	22,0	72,0	10,0	2,5	47015	-	-
12,0	15,0	73,0	12,0	1,0	47016	47024	-
12,0	26,0	83,0	12,0	0,5	47017	47025	-
12,0	26,0	83,0	12,0	0,76	47018	47026	-
12,0	26,0	83,0	12,0	1,0	47019	47027	-
12,0	26,0	83,0	12,0	1,5	47020	47028	-
12,0	26,0	83,0	12,0	2,0	47021	47029	-
12,0	26,0	83,0	12,0	2,5	47022	47030	-
12,0	26,0	83,0	12,0	3,0	47023	47031	-

(continued on next page)