




TOLERANCES (inch)		
DIAMETER	D ₁	D ₂
1/8 - 1/4	+0.0000 / -0.0012	h6
> 1/4 - 3/8	+0.0000 / -0.0016	h6
> 3/8 - 1	+0.0000 / -0.0020	h6

CORNER RADIUS TOLERANCES (inch)	
R	+0.0000 / -0.0020

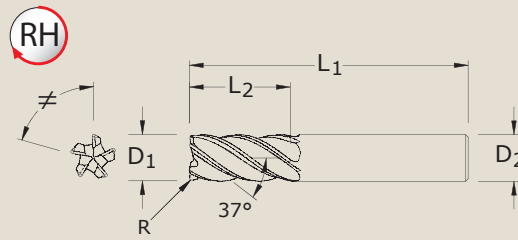

**SERIES Z5CR
(FRACTIONAL)
(CONTINUED)**

Cutting Diameter D ₁	Length of Cut L ₂	Overall Length L ₁	Shank Diameter D ₂	Corner Radius R	Ti-Namite-M (TM) EDP No. w/o Flat	Ti-Namite-M (TM) EDP No. w/ Flat	Ti-Namite-M (TM) EDP No. w/Internal Coolant
5/8	1-1/4	3-1/2	5/8	.030	37076	37083	37269
5/8	1-1/4	3-1/2	5/8	.060	37077	37084	37270
5/8	1-1/4	3-1/2	5/8	.090	37078	37085	37271
5/8	1-1/4	3-1/2	5/8	.120	37079	37086	37272
5/8	1-1/4	3-1/2	5/8	.190	37080	37087	37273
3/4	7/8	4	3/4	.030	37089	37096	37275
3/4	7/8	4	3/4	.060	37090	37097	37276
3/4	7/8	4	3/4	.090	37091	37098	37277
3/4	7/8	4	3/4	.120	37092	37099	37278
3/4	7/8	4	3/4	.190	37093	37100	37279
3/4	7/8	4	3/4	.250	37094	37101	37280
3/4	1-1/2	4	3/4	.030	37103	37110	37282
3/4	1-1/2	4	3/4	.060	37104	37111	37283
3/4	1-1/2	4	3/4	.090	37105	37112	37284
3/4	1-1/2	4	3/4	.120	37106	37113	37285
3/4	1-1/2	4	3/4	.190	37107	37114	37286
3/4	1-1/2	4	3/4	.250	37108	37115	37287
1	1-1/8	4	1	.030	37117	37124	37289
1	1-1/8	4	1	.060	37118	37125	37290
1	1-1/8	4	1	.090	37119	37126	37291
1	1-1/8	4	1	.120	37120	37127	37292
1	1-1/8	4	1	.190	37121	37128	37293
1	1-1/8	4	1	.250	37122	37129	37294
1	1-1/2	4	1	.030	37131	37138	37296
1	1-1/2	4	1	.060	37132	37139	37297
1	1-1/2	4	1	.090	37133	37140	37298
1	1-1/2	4	1	.120	37134	37141	37299
1	1-1/2	4	1	.190	37135	37142	37300
1	1-1/2	4	1	.250	37136	37143	37301
1	2	4-1/2	1	.030	37145	37152	37303
1	2	4-1/2	1	.060	37146	37153	37304
1	2	4-1/2	1	.090	37147	37154	37305
1	2	4-1/2	1	.120	37148	37155	37306
1	2	4-1/2	1	.190	37149	37156	37307
1	2	4-1/2	1	.250	37150	37157	37308